


ITEM NO. _____
 DESCRIPTION _____



BILL OF MATERIAL

Power Requirements 480V/3phase - 250 Amps
 Hydraulic Fluid 400 Gallons of Premium quality
 hydraulic oil with a viscosity
 range of 150-250 SSU at 38
 degrees Celsius. Normal operating
 range between 80-1000 SSU.
 Typical SSU 70

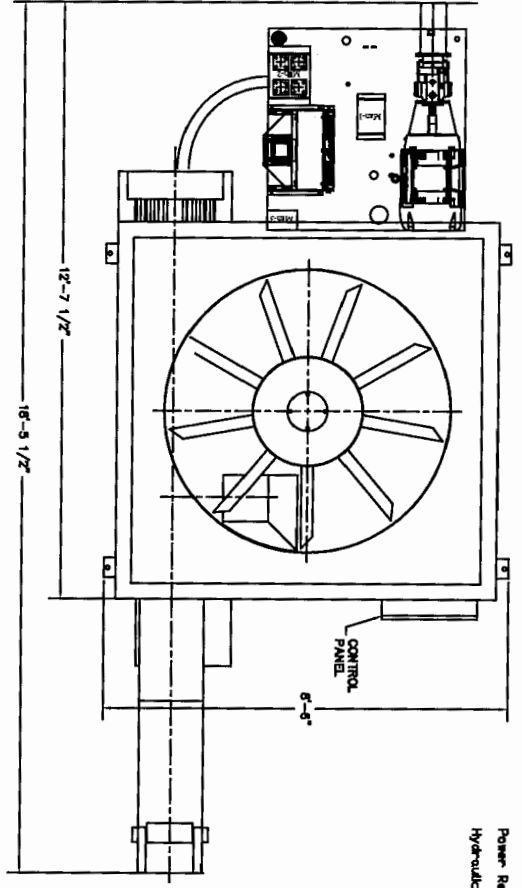

APPROVED FOR PRODUCTION
 By: _____
 Date: _____

CONFIDENTIAL INFORMATION
 The Agency and its subsidiaries undertake to
 own the property of A&S, Inc. and every part
 thereof, including but not limited to the
 drawings, shall be returned to A&S, Inc.
 by A&S, Inc.

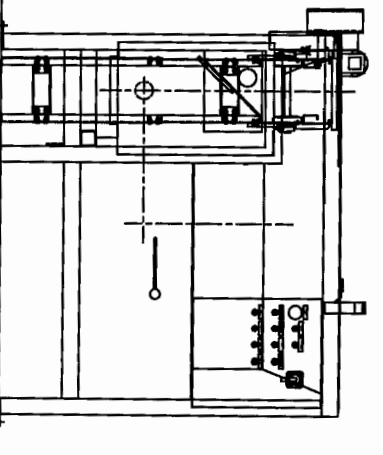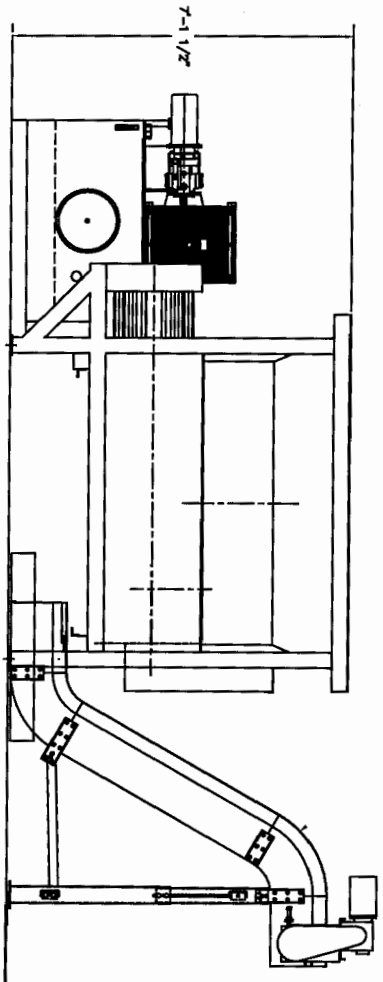

APPLIED
 RECOVERY SYSTEMS

STD LAYOUT
 RST 1500 BROCHURE

SEVERAL DWS
 10/15/08 150000