
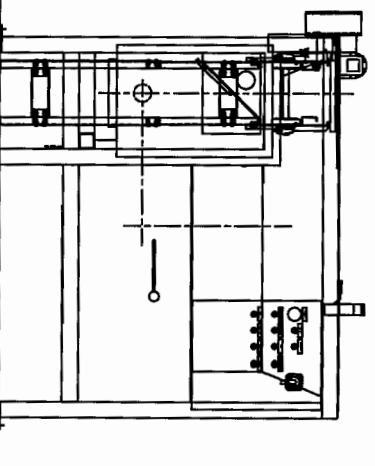
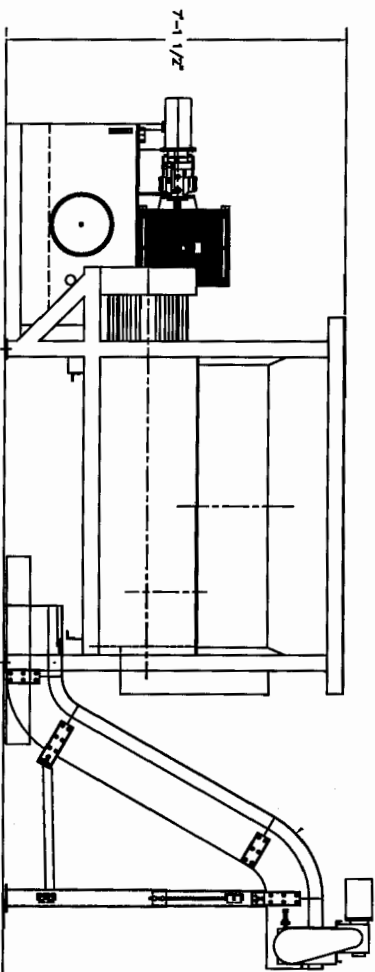


ITEM NO. \_\_\_\_\_  
 DESCRIPTION \_\_\_\_\_  
 BILL OF MATERIAL

Power Requirements 480V/3phase - 250 amps  
 Hydraulic Fluids 400 Gallons of Premium quality  
 Hydraulic oil with a viscosity  
 range of 150-250 SSU at 38  
 degrees Celsius. Minimum Operating  
 range between 90-1000 SSU  
 Typical ISO 46

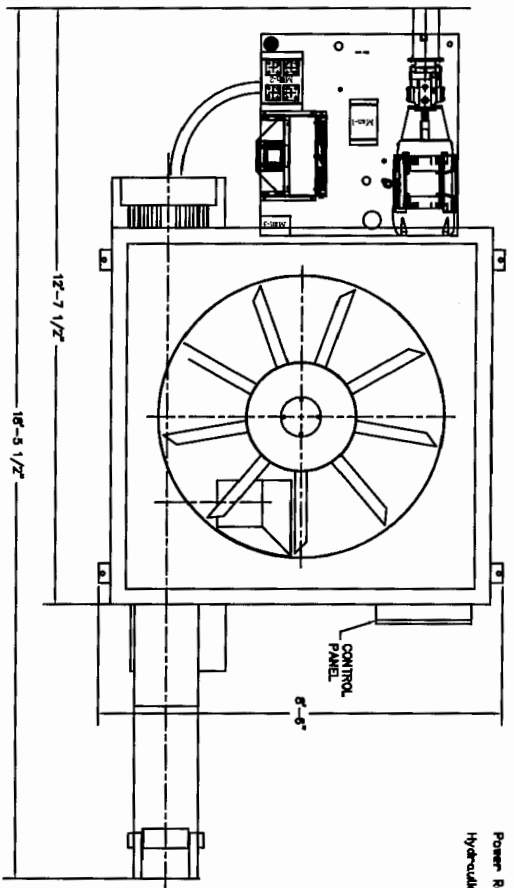

APPROVED FOR PRODUCTION  
 By: \_\_\_\_\_  
 Date: \_\_\_\_\_

**CONFIDENTIAL INFORMATION**  
 The making and use of information contained in this document is the property of A&L, Inc. and may not be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of A&L, Inc.

**ARB** APPLIED SNO LAYOUT SHEET  
 RECOVERY SYSTEMS RST 2000 BRACKETIER  
 DATE: 06/15/03  
 DESIGNED BY: \_\_\_\_\_  
 CHECKED BY: \_\_\_\_\_  
 DATE: \_\_\_\_\_